

# KA2402

# DC MOTOR SPEED CONTROLLER


## INTRODUCTION

### USE

- Speed control or general-purpose low-voltage compact DC motor for microcassette tape recorders, radio cassettes and their equivalents.

### FEATURES

- Operating supply voltage range  
KA2402:  $V_{CC}=1.8V \sim 8V$
- Capable of making the applicable set compact because of a minimum of adjust speed.
- Easy to adjust speed.
- Built-in stable low reference power meeting the requirements for 2 speeds.
- $V_{REF} = 0.2V$

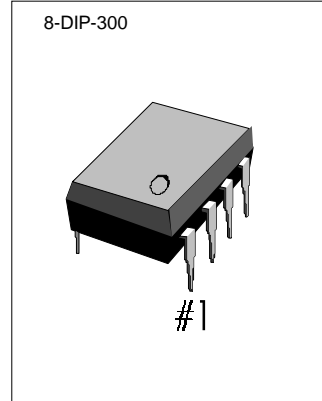

## ORDERING INFORMATION

| Device | Package   | Operating Temperature |
|--------|-----------|-----------------------|
| KA2402 | 8-DIP-300 | -20°C ~ +80°C         |

## BLOCK DIAGRAM

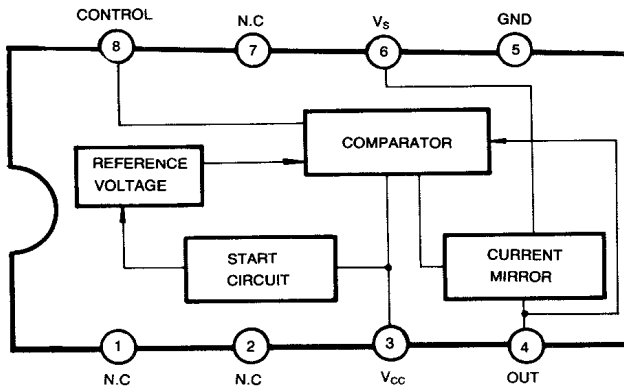


Fig. 1

# KA2402

# DC MOTOR SPEED CONTROLLER

## ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

| Characteristic         | Symbol              | Value      | Unit |
|------------------------|---------------------|------------|------|
| Maximum Supply Voltage | V <sub>CC</sub>     | 10         | V    |
| Maximum Motor Current  | I <sub>M(MAX)</sub> | 700        | mA   |
| Power Dissipation      | P <sub>D</sub>      | 600        | mW   |
| Operating Temperature  | T <sub>OPR</sub>    | -20 ~ +80  | °C   |
| Storage Temperature    | T <sub>STG</sub>    | -40 ~ +125 | °C   |

## RECOMMENDED OPERATING CONDITIONS (Ta = 25 °C)

| Characteristic                    | Symbol           | Value    | Unit |
|-----------------------------------|------------------|----------|------|
| Supply Voltage                    | V <sub>CC</sub>  | 1.8 ~ 8  | V    |
| Recommended Operating Temperature | T <sub>OPR</sub> | -20 ~ 60 | °C   |

## ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

| Characteristic                                    | Symbol  | Test Conditions   | Min  | Typ    | Max  | Unit |
|---|---|---|------|--------|------|------|
| Reference Voltage                                 | V <sub>REF</sub>                                  | V <sub>CC</sub> = 3V, I <sub>M</sub> = 100mA  | 0.18 | 0.2    | 0.22 | V    |
| Circuit Current                                   | I <sub>CC</sub>                                   | V <sub>CC</sub> = 3V, I <sub>M</sub> = 100mA  |      | 2.4    | 6.0  | mA   |
| Current Coefficient                               | K   | V <sub>CC</sub> = 3V, I <sub>M</sub> = 50mA<br>I <sub>M</sub> = 100mA                     | 45   | 50     | 55   |      |
| Saturation Voltage                                | V <sub>SAT</sub>                                  | V <sub>CC</sub> = 3V, I <sub>M</sub> = 100mA  |      | 0.13   | 0.3  | V    |
| Voltage Characteristic of Reference Voltage       | $\frac{\Delta V_{REF}}{V_{REF}} / \Delta V_{REF}$ | I <sub>M</sub> = 100mA,<br>V <sub>CC</sub> = 1.8 ~ 8V (KA2402)<br>1.8 ~ 4.5V (KA2402D)    |      | 0.1    |      | %/V  |
| Voltage Characteristic of Current Coefficient     | $\frac{\Delta K}{K} / \Delta V_{CC}$              | I <sub>M</sub> = 50, 150mA<br>V <sub>CC</sub> = 1.8 ~ 8V (KA2402)<br>1.8 ~ 4.5V (KA2402D) |      | 0.3    |      | %/mA |
| Voltage Characteristic of Reference Voltage       | $\frac{\Delta V_{REF}}{V_{REF}} / \Delta I_M$     | I <sub>M</sub> = 3V<br>I <sub>M</sub> = 20 ~ 200mA  |      | 0.005  |      | %/mA |
| Current Characteristic of Current Coefficient     | $\frac{\Delta K}{K} / \Delta I_M$                 | V <sub>CC</sub> = 3V, I <sub>M</sub> = 20, 50mA<br>-170, 200mA                            |      | -0.07  |      | %/mA |
| Temperature Characteristic of Reference Voltage   | $\frac{\Delta V_{REF}}{V_{REF}} / \Delta T_a$     | V <sub>CC</sub> = 3V, I <sub>M</sub> = 100mA<br>T <sub>a</sub> = -20 ~ +80 °C             |      | -0.008 |      | %/°C |
| Temperature Characteristic of Current Coefficient | $\frac{\Delta K}{K} / \Delta T_a$                 | V <sub>CC</sub> = 3V, I <sub>M</sub> = 50mA, 150mA<br>T <sub>a</sub> = -20 ~ +80 °C       |      | 0.02   |      | %/°C |

# KA2402

# DC MOTOR SPEED CONTROLLER

## TEST CIRCUIT

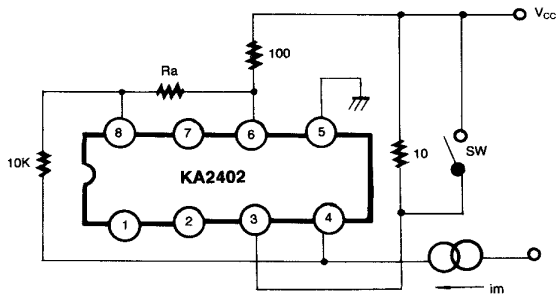


Fig. 2

## APPLICATION CIRCUIT


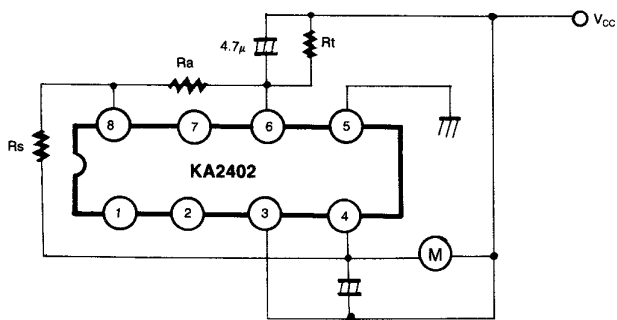


Fig. 3

# 8-DIP-300

Dimensions in Millimeters/inches

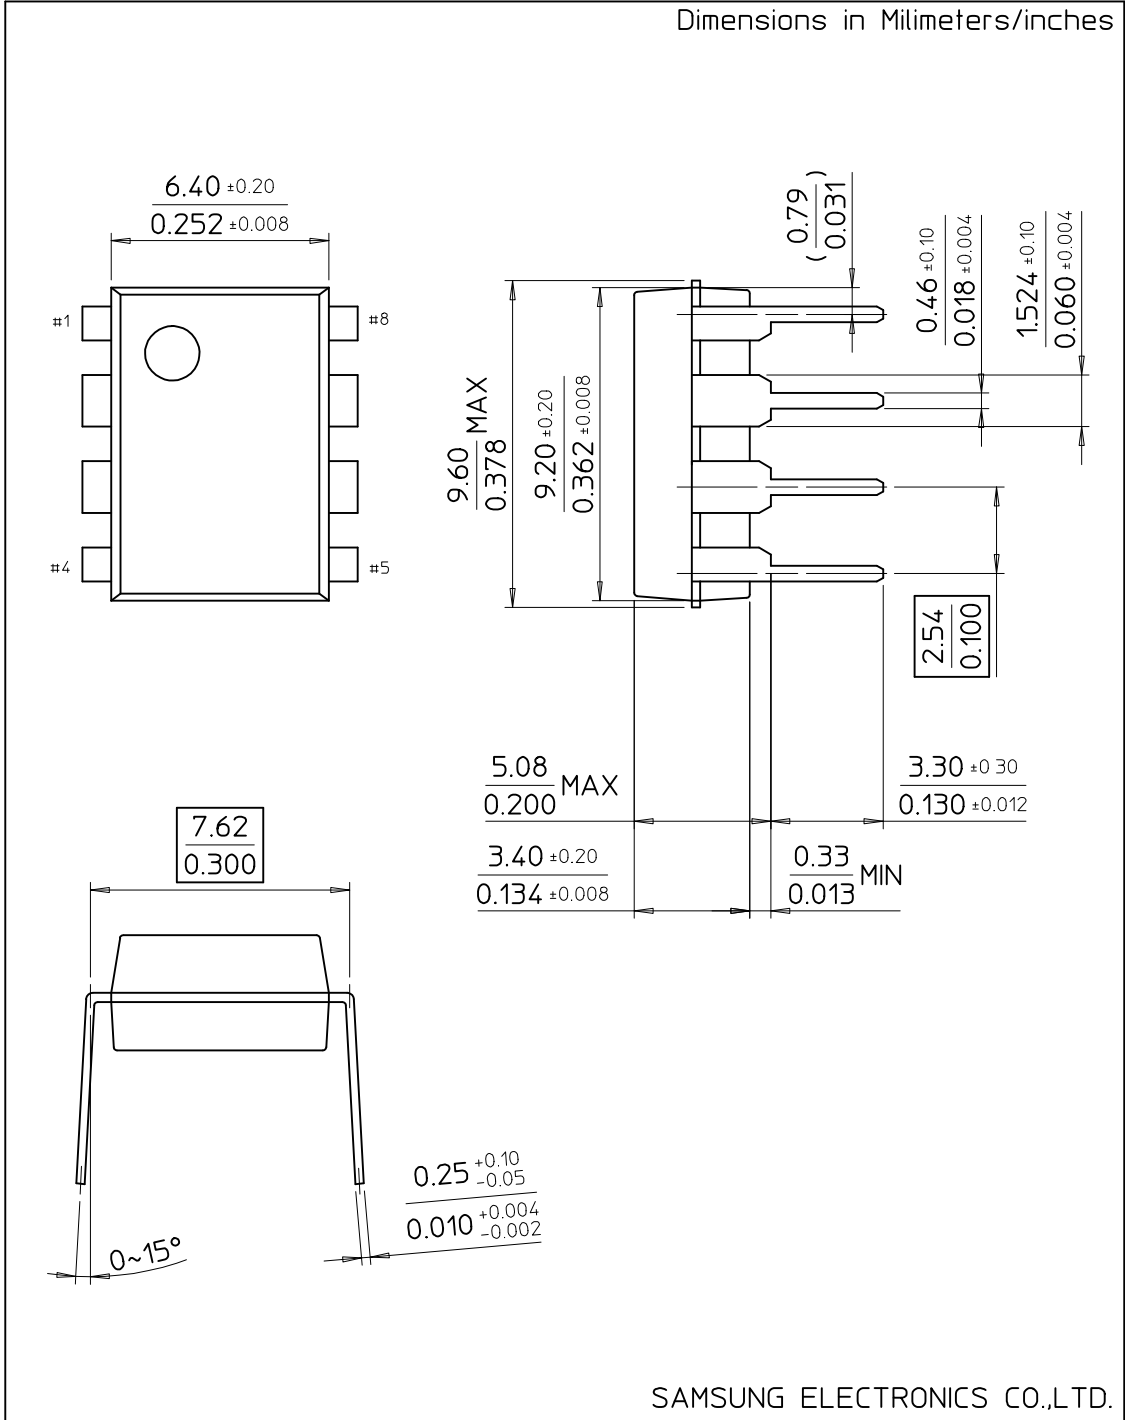

SAMSUNG ELECTRONICS CO.,LTD.